



US 20030047616A1

(19) **United States**

(12) **Patent Application Publication**

Mase et al.

(10) **Pub. No.: US 2003/0047616 A1**

(43) **Pub. Date: Mar. 13, 2003**

(54) **CODING SYMBOLOGY AND A METHOD
FOR PRINTING SAME**

Related U.S. Application Data

(76) Inventors: **Joseph C. Mase**, Chicago, IL (US);
Margaret Trinidad, Spring Grove, IL
(US); **Scott Edwards**, Libertyville, IL
(US)

(60) Provisional application No. 60/280,073, filed on Mar.
30, 2001.

Publication Classification

(51) **Int. Cl.⁷** **G06K 19/06**
(52) **U.S. Cl.** **235/494**


Correspondence Address:
Stephen R. Auten, Esq.
Wallenstein & Wagner, Ltd.
53rd. Floor
311 S. Wacker Drive
Chicago, IL 60606-6630 (US)

(57) **ABSTRACT**

(21) Appl. No.: **10/075,153**

(22) Filed: **Feb. 14, 2002**

The present invention provides forming a coding symbology
by disposing a plurality of light-reflecting segments sepa-
rated by spaces on a substrate. The coding symbology
represents fixed information and variable information.

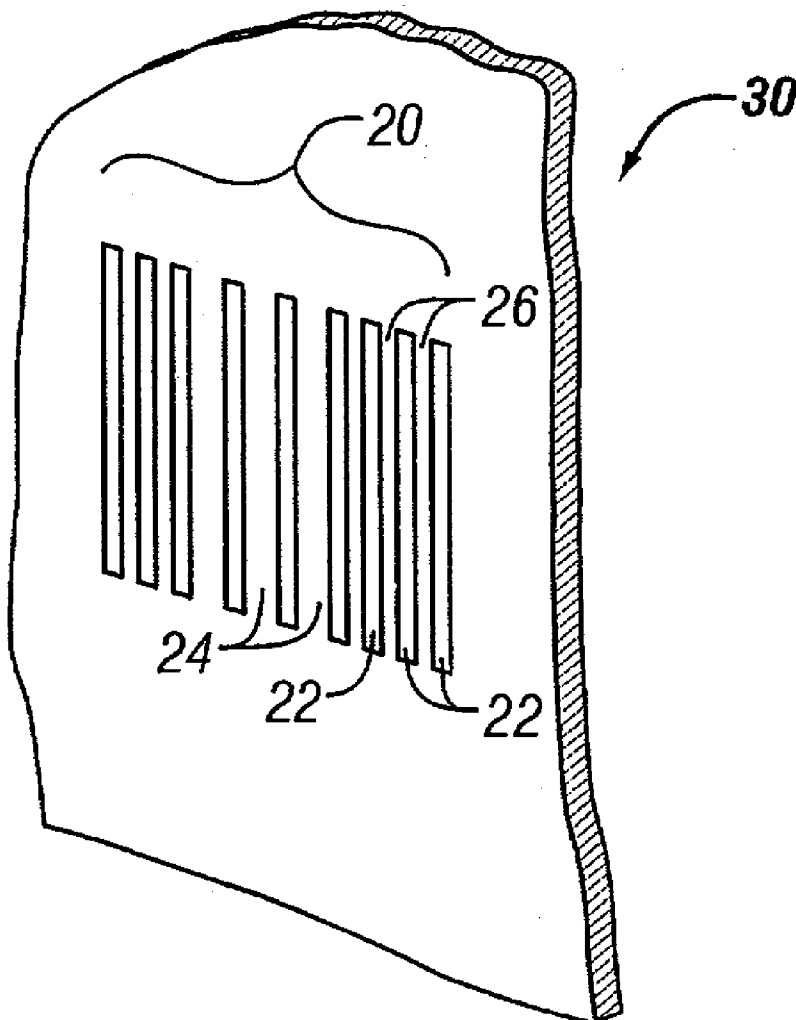

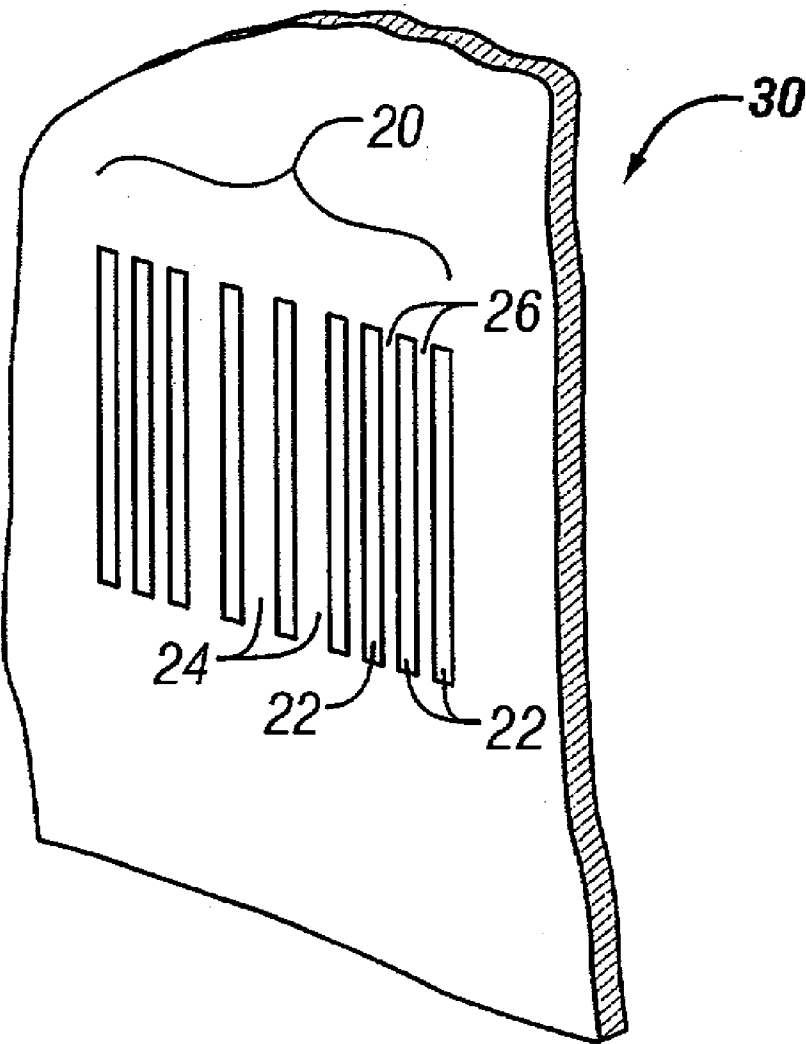


FIG. 1

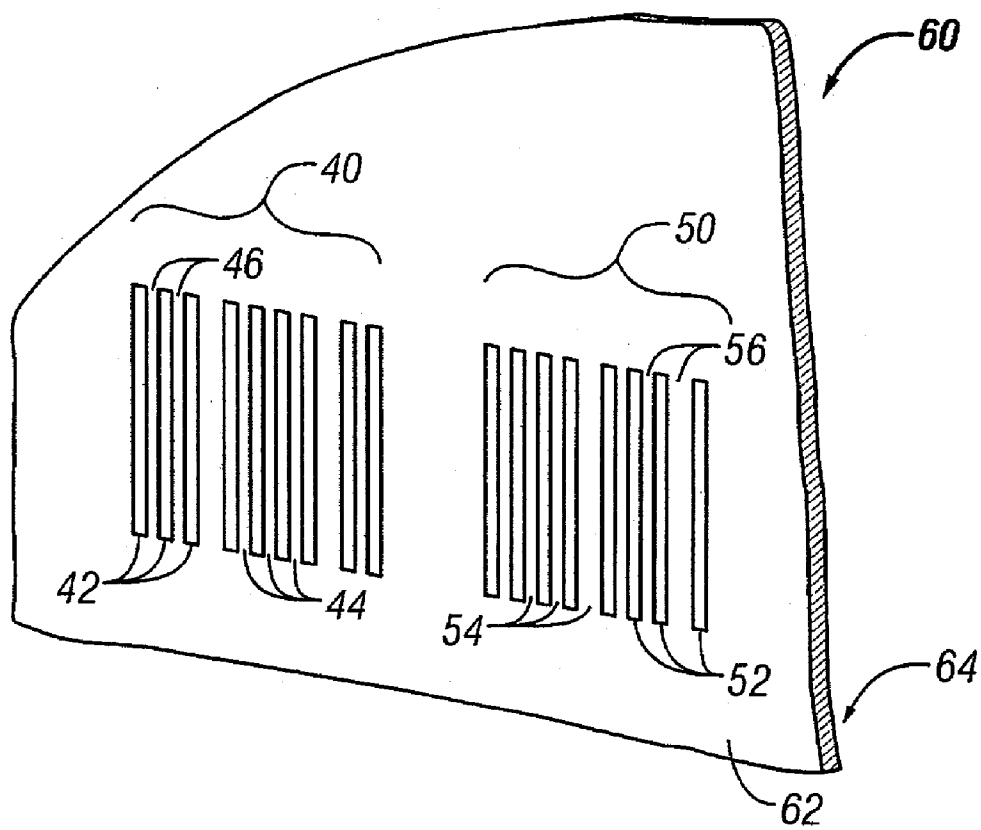


FIG. 2



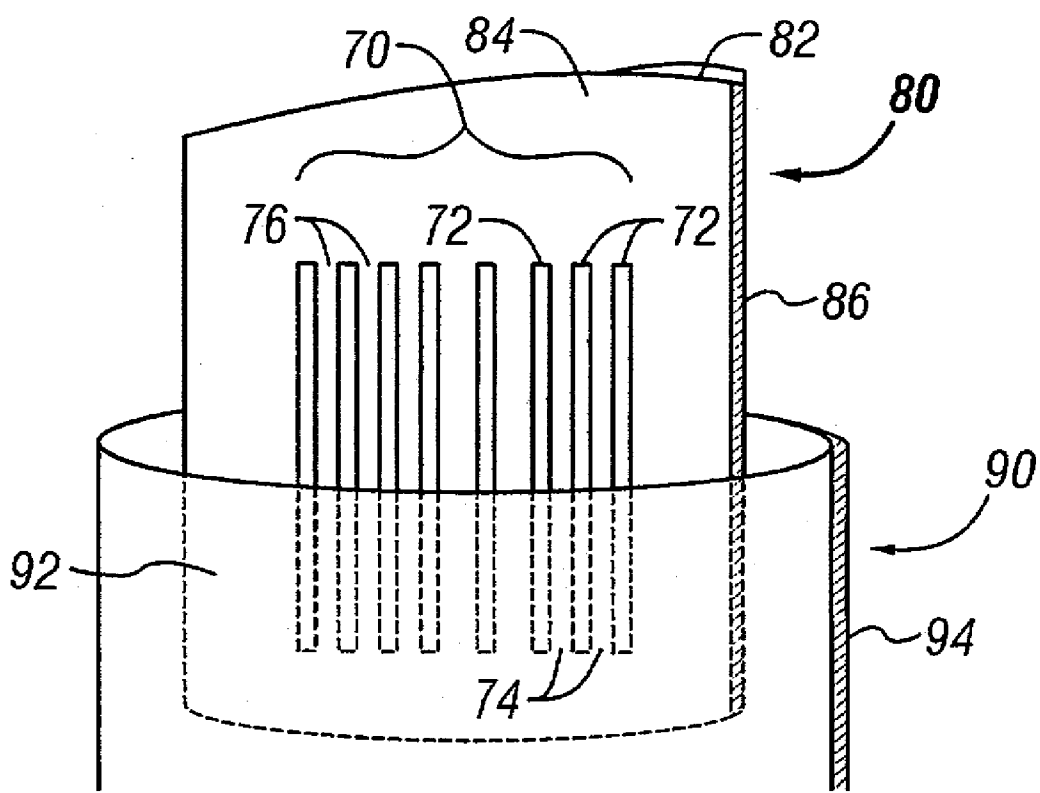


FIG. 3

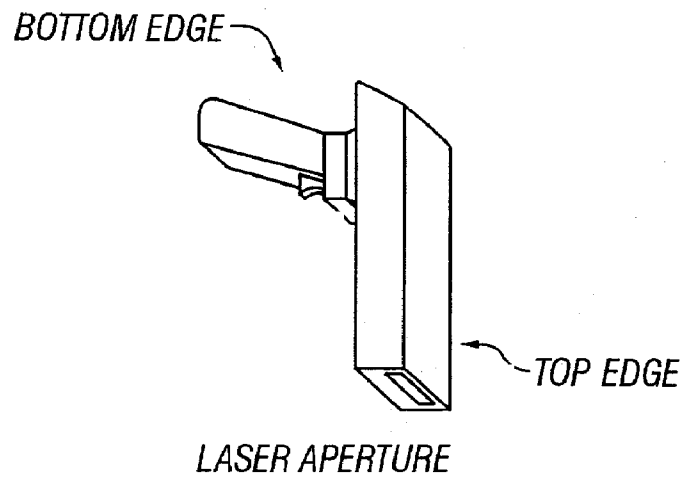

LASER BEAM PATH (@ 90° ABOVE BARCODE)



"HUMAN READABLE DATA" _____ "TOP" SIDE
BARCODE

***NOTE:** H = BARCODE LABEL SURFACE TO LASER APERTURE SURFACE

FIG. 4

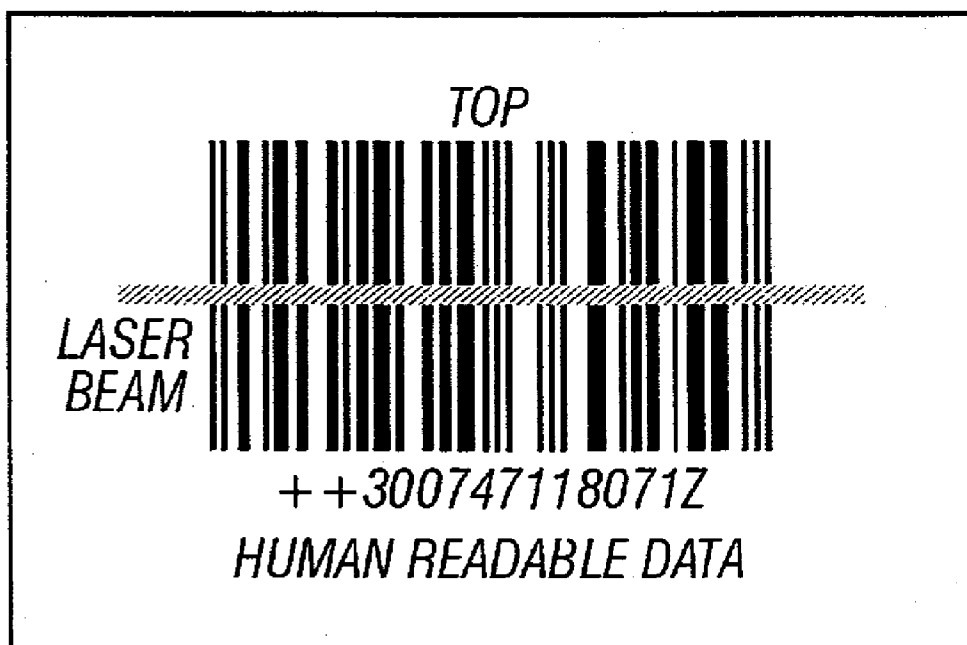


FIG. 5

CODING SYMBOLOGY AND A METHOD FOR PRINTING SAME

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to copending U.S. Provisional Application entitled "Coding Symbolology and a Method for Printing Same", having serial No. 60/280,073, filed Mar. 30, 2001, which is entirely incorporated herein by reference.

[0002] This is a Utility Application of Provisional Application No. 60/280073 filed on Mar. 30, 2001.

DESCRIPTION

[0003] 1. Technical Field

[0004] The present invention relates to a coding symbolology containing fixed information and variable information, as well as a method for transferring same. The invention is especially suitable for flexible, transparent thermoplastic containers of liquid products that are commonly used in medical procedures.

[0005] 2. Background of the Invention

[0006] Various foodstuffs, liquids, and other substances can be sterilely packaged in pouch-type flexible containers made from webs of flexible film, sheet stock, or like material that is sealed together along the peripheral edges. There are a number of advantages to these pouch-type flexible containers, including low weight, durability, and low cost fabrication.

[0007] Various medical solutions are sterilely packaged in pouch-type flexible containers. The medical solutions can be pharmaceutical, flushes, nutrition, irrigating, respiratory therapy agents, dialysis, blood, blood products, plasma derivatives, plasma expanders, blood substitutes, anti-coagulants, blood preservatives, and the like. Such solutions can be delivered to a patient through an administration tubing set connected with the flexible container. Other medical solutions include enterals, anesthesia inhalants, veterinarian, media, and the like. The container may include one or more access tubes or fittings through which the liquid is pumped to fill initially the container during manufacture of the package and to which the administration set and

[0008] The use of bar coding to identify the contents of a container is widespread in the medical industry. For example, bar code identification systems allow a hospital to track electronically its inventory of pharmaceutical products, and the subsequent billing to the patient for the use thereof. Bar codes are also used in automated agent compounding systems to mix properly the correct and proper amounts of medical and therapeutic agents. More important, bar codes also allow hospitals to monitor its medications or other therapeutic fluids that are targeted for infusion into its patients by marking same with fixed information such as product code names or numbers.

[0009] Historically, a two-color system was implemented in bar coding systems. That is, a typical bar code consisted of black lines on a white background. When a bar code reader would read the bar code, the black lines would absorb the reader's laser light while the white spaces would reflect the reader's laser light back to the reader where the reflected

information was translated into its corresponding analog counterpart. This two-color system naturally led to the development of a two-step process for printing the bar code.

[0010] First, the container was passed through a printing machine that applied a reflective (generally white) background field for the bar code. Next, the container was passed through a second printing machine that applied the dark, light-absorbing lines of the bar code over the top of the background field. One common printing method was the hot-stamping (die-cast) system.

[0011] In a hot-stamping system, a metal die is engraved in the desired image or bar code, heated to a predetermined temperature, and applied under pressure to the substrate in order to transfer the image or bar code from the hot-stamp foil. The foil acts as the pigment (ink) carrier and is fed between the hot-stamp die and the substrate. One problem is that the die has sharp edges that oftentimes damage the flexible substrates heretofore mentioned, thus increasing the scrap rate. Still yet another problem is that the hot-stamp die is costly to produce, taking several hours, or even days, to manufacture. Accordingly, a hot-stamping system is unsuitable for printing images representative of variable information such as lot numbers, batch numbers, expiration dates or any other data that changes in a fixed time period, such as by the minute, hour, or day.

[0012] Consequently, the hot-stamping system can be used to print feasibly only fixed information such as a product's name, manufacturer, and the like. One method of overcoming this deficiency is to print labels and apply them to the product. Naturally, this increases costs and decreases production rates, as well as opens the possibility for the label(s) to fall off of the product.

[0013] Several other problems exist with the hot-stamping system as it relates to the readability of the bar codes on flexible, transparent containers such as those commonly used in the medical industry. The first problem with the readability of images printed by the hot-stamping system is that the transparent (light-absorbing) nature of the containers in such systems requires that a solid (light-reflecting) background block be printed on the container before the dark (light-absorbing) lines of the bar code can be printed thereon. Not only is there the increased cost associated with two printing passes to achieve the two colors, but it is also fundamentally difficult to print a solid background block using the hot-stamping method because air pockets commonly form in the ink, which cause voids in the block, resulting in an unreadable bar code. Additionally, because the background block naturally requires more pigment or ink than the contrasting bars, there is an increased risk for pigment extractives and leachables to exist in the container's solution.

[0014] A second problem is that because the hot-stamping system uses variable heat, variable pressure, and a fixed dwell time to transfer images or bar codes onto the substrate, there is a problem of the ink bleeding or growing too thick, which causes an unreadable bar code or poor edge definition of the bar code symbolology. To correct this problem, the dies have to be redesigned, re-machined, or re-engraved at a reduced size so that when applied, the correct bar code size is achieved. Alternatively, the size of the bar code symbolology, including bar spacing, could be increased if space limitations on the substrate so allowed. Both solutions,

however, increase costs and decrease productivity. A third problem is that the inks in a hot-stamping system are designed to adhere to the underlying substrate, and not each other, further contributing to an unreadable bar code and mandating the development of inks that adhere to each other. Fourth, hot-stamping typically yields a bar code with a "D" or "F" American National Standards Institute (ANSI) scale read (with "A" being the highest resolved image). See e.g., *American National Standard for Information Systems—Bar Code Print Quality Guidelines*, by The American National Standards Institute, ©1990 by Information Technology Industry Council, and which is incorporated by reference as though set forth herein.

[0015] At least one attempt has been made to reduce the problems associated with a two-color, hot-stamping system, and is found in PCT patent application number PCT/US99/05614, bearing International Publication Number WO 99/49408, which is incorporated herein by reference as though fully set forth herein. The '408 application discloses a container bearing a negative image bar code generated using the above-described hot-stamping system (page 8, lines 22-24). The bar code is a negative image in that the light-reflecting segments of the underlying substrate correspond to the background spaces (generally white) of a traditional bar code, and the light-absorbing segments of the underlying substrate correspond to the light-absorbing dark segments (generally black) of a traditional bar code.

[0016] Even prior thereto, the ability to print a negative bar code image had been known in the art as evidenced in the publication *Barcodes and Other Automatic Identification Systems*, by Robert D. LaMoreaux at page 176, ©1995 by Pira International, which is incorporated herein by reference as though fully set forth herein. Notwithstanding the advantages of a one-color system, the remaining aforementioned problems with the hot-stamping system still exist, including the inability to print fixed and variable information in a single printing pass.

[0017] Unlike the hot-stamping system, the thermal transfer printing system uses a low level of heat that transfers images (such as a bar code) from a printing head under light contact with the substrate. Because the bar code is not printed under pressure, there is a superior bar code symbolology edge definition. That is, thermal transfer printing generally yields bar codes with an "A" or "B" ANSI scale read. Furthermore, the present inventors found that when an "A" quality code is printed using the thermal transfer system, the same code produces a "C" quality read through a 10 mil high-density polyethylene overpouch, the overpouch being well-known in the medical art.

[0018] Another benefit of the thermal transfer printing system is that because the print head contains no sharp edges like the hot-stamp die, the print head does not damage the flexible substrate, thus reducing the scrap rate. Another benefit is that the thermal transfer printing system uses less pigment or ink than the hot-stamping system, resulting in a lower risk of leachables or extractables in the container's solution. Still another benefit is that the thermal transfer printing head yields a higher degree of flexibility than the hot-stamp die because the image information can be easily changed in a matter of minutes at an input terminal, as opposed to waiting hours, or even days, for a hot-stamp die to be redesigned, re-machined, or even re-created. There are

a number of these thermal transfer systems commercially available from different manufacturers such as SmartDate® (MARKEM) and Jaguar J27i4 (Norwood Marking Systems).

[0019] Still yet another benefit of the thermal transfer printing system over the hot-stamping system is the ability to print smaller bar codes that will be accurately read. For example, the thermal transfer printing system requires on average approximately one-third to two-thirds of the length required for the hot-stamping system to print a code of a comparable symbol grade, depending on the substrate. In short, the thermal transfer printing system requires less space and provides superior bar code edge definition over the hot-stamping system. These advantages allow one to print fixed and variable information, including the label copy information, on pharmaceutical and medical agents, on either side, or both sides, of a container. Conversely, the size and resolution limitations of the hot-stamping method force one to print fixed information on one side of the container and variable information on the other side. These limitations add the manipulation of turning the container over and running a second printing pass, which in turn, increases costs and decreases productivity. Accordingly, the thermal transfer printing system affords improved cost efficiency, time efficiency, and bar code image resolution over the hot-stamping system. Notwithstanding, there still exists the problem of printing in a single pass a high resolution, one-color bar code that contains both fixed information and variable information.

[0020] The present invention is provided to solve these and other problems.

SUMMARY OF THE INVENTION

[0021] The present invention provides a novel identification system and a method for employing the system. The identification system can be used to control inventory, to track a patient's billing, to monitor particular dosages, to reduce potentially patient safety errors when used in combination with other safety systems possibly not yet employed and those as described in U.S. Pat. Nos. 6,139,495; 6,032,155; 5,845,264; and 5,700,998 which are incorporated by reference as though fully set forth herein, and to accomplish innumerable other means and methods.

[0022] The coding symbology of the present invention comprises a substrate and a plurality of light-reflecting segments separated by spaces that are disposed on the substrate. The spaces on the substrate define light-absorbing segments. Together, the light-reflecting segments and the light-absorbing segments define a negative image bar code representing fixed information and variable information.

[0023] The present invention further provides that the coding symbology is detectable using a reader. It is understood that a reader can be any form of a bar code reader presently known, the details of which form no part of the present invention. In general, the bar code reader directs a form of energy on the image or bar code and receives all or a portion of the energy that is reflected from the image or bar code. Preferably, the reader will then translate the reflected energy into a data form readily understood by humans.

[0024] The present invention also provides that the light-reflecting segments are indicia that can be detected by a

reader, even though the indicia may or may not be visible to the naked human eye. That is, the light-reflecting segments may exist at a wavelength outside the visible light spectrum. It is known within the art that bar codes could be fluorescent, which is outside the visible spectrum and is the subject of U.S. Pat. No. 5,547,501, which is incorporated by reference as though fully set forth herein. In short, the present invention contemplates both visible and invisible coding symbologies, or a combination thereof, provided that the reflectivity difference between the light-reflecting segments disposed on the substrate and the light-absorbing segments defined on the substrate enables the resulting image to be detected by a reader. If the indicia are visible to the naked human eye, the indicia can have a color within the visible light spectrum.

[0025] The substrate can be of any chemical composition, preferably comprising a thermoplastic polymer or a thermoset polymer, and even more preferably where the substrate comprises a medical container. In another embodiment, two or more coding symbologies are disposed on a substrate wherein the combination of the two or more codes represents fixed and variable information. Two or more codes could also be disposed within a container system comprising at least one substrate forming a container and at least one material. One coding symbology or a plurality of symbologies could be disposed anywhere in the container system. The present invention contemplates that the container system comprises a substrate forming a medical container and a material forming an overpouch that covers at least a part of the substrate.

[0026] The present invention also provides a method for transferring a negative image bar code onto a web of material by first providing a web of material. The next step of the method is to provide a printer capable of transferring a negative image bar code onto the web in response to a signal representative of the negative image bar code. According to the invention, the negative image bar code represents fixed information and variable information. The negative bar code image is then transferred to the printer via the signal and transferred onto the web of material. Preferably, the printer is a thermal transfer printer. The present method also contemplates that any predetermined number of negative image bar codes could be transferred in this manner.

[0027] Additional features and advantages of the present invention are described in, and will be apparent from, the best mode for carrying out the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] FIG. 1 is a fragmentary, perspective view of a coding symbology representing fixed information and variable information in a single, collective image transferred onto a substrate.

[0029] FIG. 2 is a fragmentary, perspective view of a coding symbology representing fixed information and variable information in at least two, collective images transferred onto a substrate.

[0030] FIG. 3 is a fragmentary view of a container system having a substrate with a coding symbology representing fixed information and variable information, and a material positioned over a portion of the coding symbology.

[0031] FIG. 4 illustrates the relative position of the Laser Scanner to the barcode in the comparative analysis.

[0032] FIG. 5 shows an exemplary coding symbology produced by hot-stamp or thermal transfer methods.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0033] While this invention is susceptible of embodiments in many different forms, and will herein be described in detail, preferred embodiments of the invention are disclosed with the understanding that the present disclosure is to be considered as exemplifications of the principles of the invention and are not intended to limit the broad aspects of the invention to the embodiments illustrated.

[0034] FIG. 1 illustrates a negative image bar code image representing fixed information and variable information that is transferred on a substrate. The bar code is designated generally by reference numeral 20. The bar code 20 includes a plurality of light-reflecting segments 22 that are separated by spaces 24. The spaces 24 define light-absorbing segments 26. The light-reflecting segments 22 and light-absorbing segments 26 define the negative image bar code 20 representing fixed information and variable information. The bar code 20 and the light-reflecting segments 26 are disposed on a substrate 30.

[0035] The substrate 30 can be any known chemical composition, including a thermoplastic or thermoset polymer. Suitable thermoplastic and thermoset polymers are polyvinylchloride, polyvinylidenechloride, polyolefins, polyamides, polycarbonates, polyesters, thermoplastic elastomers, elastomers, polyimides, polyurethanes, ethylene vinyl alcohol copolymers, ethylene vinyl acetate copolymers, ethylene copolymers, propylene copolymers, acrylic acid copolymers, ethylene substituted acrylic acid copolymers, α -olefin substituted acrylic acid copolymers, hydrocarbon block polymers, ethylene propylene diene polymers, nylon, mono-layer film structures, and multi-layer film structures such as those disclosed in U.S. Pat. Nos. 6,168,862; 6,083,587; 5,998,019; 5,993,949; 5,935,847; 5,693,387; 5,686,527; 4,299,367; and 3,912,843, which are incorporated by reference as though fully set forth herein. The α -olefin, which preferably contains about 2 to 20 carbons, could be produced by any method known generally. More particularly, the α -olefin is ethylene or propylene.

[0036] Preferably, the substrate 30 is of a chemical composition such that the reflectivity difference between the substrate 30 and the light-reflecting segments 22 allows the light-reflecting segments 22 to form indicia (not shown) that can be detected by a reader (not shown). In terms of percent reflectance, it is known in the art that a preferred maximum reflectance for the light-absorbing segments of a coding symbology is about 25 percent, which also corresponds to the preferred minimum reflectance for the light-reflecting segments. The maximum reflectance of the light-absorbing segments and the minimum reflectance of the light-reflecting segments need not be achieved simultaneously. It is preferred that the overall profile reflectance grade of the coding symbology permits the light-reflecting segments, and more preferably the coding symbology, to be detected by a reader.

[0037] The indicia of the light-reflecting segments 22 may not be visible to the naked human eye, or preferably, may be

visible to the naked human eye so that the bar code **20** can be easily located and read by a bar code reader (not shown). The indicia of the light-reflecting segments **22** may be colored white, red, yellow, orange, gold, silver, or any combination thereof. The preferred color will depend on the reflective index of the chosen substrate and on the wavelength of energy used by the reader. As previously stated, it is understood that any color may be used provided that the reflectivity difference between the substrate **30** and the light-reflecting segments **22** allows the light-reflecting segments **22** to form indicia (not shown) that can be detected by a reader (not shown).

[0038] According to the invention, fixed information is defined to be information that remains unchanged for a first period of time while variable information is defined to be information that changes during the first period. Examples of fixed information include, but are not limited to, a product's: name, code number, manufacturer, National Drug Code Number, label copy data required by the Federal Food & Drug Administration (FDA), or data required by the Health Industry Bar Code Council, now known as the Health Industry Business Communications Council (HIBCC), and the like. Examples of variable information include, but are not limited to, a product's: lot number, batch number, expiration date, serial number, production time, price, inventory control data, and concentration.

[0039] FIG. 2 shows another contemplated commercial embodiment of the present invention and illustrates a fragmentary, perspective view of a coding symbology representing fixed information and variable information in at least two, collective images. The coding symbology contains a first bar code **40** representing fixed information and a second bar code **50** representing variable information. The first bar code **40** is defined, in part, by a first plurality of light-reflecting segments **42** separated by spaces **44** and disposed on the substrate **60**. The spaces **44** define a first set of light-absorbing segments **46**, which further define the remainder of the first bar code **40**.

[0040] The second bar code **50** represents variable information. The second bar code **50** is defined, in part, by a second plurality of light-reflecting segments **52** separated by spaces **54**. The spaces **54** define a second set of light-absorbing segments **56**, which further define the remainder of the second bar code **50**. It is understood that the first plurality of light-reflecting segments **42** and second plurality of light-reflecting segments **52** may be of the same chemical composition, although it is not necessary. In a preferred form of the invention, the first plurality of light-reflecting segments **42** and the second plurality of light-reflecting segments **52** are a first indicia (not shown) and a second indicia (not shown), respectively, that can be detected by a reader as heretofore described. The first bar code **40** and the second bar code **60** are disposed on the substrate **60**.

[0041] As with the indicia related to the light-reflecting segments **22** of the previous embodiment, the first indicia and the second indicia of the present embodiment may not, or preferably may be, visible to the naked human eye. The first indicia (not shown) of the first plurality of light-reflecting segments **42** or the second indicia (not shown) of the second plurality of the light-reflecting segments **52** may be colored white, red, yellow, orange, gold, and silver. The preferred color will depend on the reflective index of the

chosen substrate and on the wavelength of energy used by the reader. As previously stated, it is understood that any color may be used provided that the reflectivity difference between the substrate **60** and the light-reflecting segments **42**, and between the substrate **60** and the light-reflecting segments **52**, allow the light-reflecting segments **42** and the light-reflecting segments **52** to form a first indicia (not shown) and a second indicia (not shown), respectively, that can be detected by a reader (not shown).

[0042] The present invention contemplates that any predetermined number of bar codes could be disposed on substrate **60** by repeating this procedure. Additionally, it is also understood that substrate **60** could include a predetermined number of symbologies like bar code **20** where fixed information and variable information are within the same symbology. It is also understood that the coding symbologies disclosed herein may be used in conjunction with any current bar code symbologies including, but not limited to: Code 16K, Code 39, Code 49, Codabar, Code 128, UPC-E, UPC-A, EAN-8, EAN-13, Reduced Space Symbology (RSS), composite symbol, PDF-417, Interleaved 2-of-5 (ITF), as well as two dimensional symbologies. It is further understood that either substrate **30** or substrate **60**, alone or in combination, could be used to further define a container whole or in part. It is contemplated that the container could be a medical container used to store medical solutions such as pharmaceutical, flushes, nutrition, irrigating, respiratory therapy agents, dialysis, blood, blood products, plasma derivatives, plasma expanders, blood substitutes, anti-coagulants, blood preservatives, and the like. It is also contemplated that the container could be a pouch-type flexible container. What is meant by flexible is that the mechanical modulus of the container is less than or equal to 40,000 psi when measured according to ASTM D-882.

[0043] As shown in FIG. 2, the substrate would have an interior surface **64** opposed to an exterior surface **62** that would, in turn, define the interior surface (not shown) and an exterior surface (not shown) of a container. The present invention contemplates that the first bar code **40** or the second bar code **50** could be disposed on the interior surface **64** or the exterior surface **62**, or both. Any predetermined number of symbologies could also be disposed on the interior surface **64** or the exterior surface **62**, or both. It is also contemplated that the first bar code **40**, the second bar code **50**, or any predetermined number of bar codes (not shown) could be oriented in any manner, including by not limited to, adjacent, stacked, or overlapping.

[0044] FIG. 3 is a fragmentary, perspective view of a container system having a substrate with a coding symbology representing fixed information and variable information, and a material positioned over a portion of the coding symbology. In one embodiment, there is a primary container, which is referenced by number **80**. The primary container **80** has a substrate **82** that may be of the same chemical composition as substrate **30** or substrate **60** previously described, although it is not necessary. Similar to the previously described embodiments, there is a plurality of light-reflecting segments **72** separated by spaces **74** and that are disposed on the substrate **82**. The spaces **74** define light-absorbing segments **76**. Together, the light-reflecting segments **72** and the light-absorbing segments **74** define a bar code **70** representing fixed information and variable infor-

mation. The substrate **82** defines an interior surface (not shown) and an opposed exterior surface **84** of the primary container **80**.

[0045] As part of the container system, there also exists a material **92** positioned over a portion of the bar code **70**, wherein the bar code is detectable using a reader (not shown). The bar code **70** can be disposed anywhere on the substrate **82** or even anywhere on the material **92** provided that the bar code **70** is detectable using a reader (not shown). In accord with other embodiments disclosed herein, the present invention also contemplates any predetermined number of bar codes being disposed on the substrate **82**, on the material **92**, or both and containing fixed information, variable information, or both.

[0046] In another embodiment of the container system, the material **92** is a part or the whole of an overpouch **90**. The overpouch **90** may cover a portion or all of the primary container **80**. Furthermore, the present invention contemplates that the primary container **80** may have at least one peripheral edge **86** that can be heat-sealed, radio-frequency sealed, or otherwise sealed using any known technique the details of which form no part of the present invention. The material **92** may also be developed into an overpouch **90** by sealing at least one peripheral edge **94** using any known technique, the details of which form no part of the present invention.

[0047] The substrate **82** may be made of any chemical composition provided that the reflectivity difference between the light-reflecting segments **72** and the light-absorbing segments **74** define a bar code **70** that is detectable using a reader (not shown). Similarly, the material **92** may be of any known chemical composition provided that if a bar code **70** were disposed thereon, the reflectivity difference between the light-reflecting segments **72** and the light-absorbing segments **74** would allow the bar code **70** to be detectable using a reader (not shown). Preferably, the substrate **82** and the material **92** are of a chemical composition sufficient to withstand the autoclaving process without adhering to each other.

[0048] It will be understood that the invention may be embodied in other specific forms, some of which are set forth below, without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

EXAMPLES

[0049] 1. Coding Symbolology with a Single Bar Code

[0050] As stated above, the identification system of the present invention provides a coding symbolology disposed on a substrate. The invention further provides that a plurality of light-reflecting segments, which are separated by spaces, is disposed on the substrate. The unmolested area of the substrate beneath the light-reflecting segments defines light-absorbing segments. Together, the light-reflecting segments and the light-absorbing segments define an image of a bar code. In a preferred form of the invention, the light-reflecting segments and the light-absorbing segments define a negative image of a bar code.

[0051] 2. Coding Symbolology with Two or More Bar Codes

[0052] When a second bar code is used, it is formed in the same general manner as the first bar code. That is, a second

plurality of light-reflecting segments, which are separated by spaces, is disposed on the substrate. The unmolested area of the substrate beneath the light-reflecting segments defines a second set of light-absorbing segments. Together, the second plurality of light-reflecting segments and the second set of light-absorbing segments define a second bar code. The present invention contemplates that any predetermined number of bar codes could be generated by this procedure. It is understood that when two or more bar codes are employed, the bar codes need not be disposed in physical contact with each other, adjacent to each other, or even on the same substrate, though such embodiments are contemplated.

[0053] 3. Container Systems

[0054] a. Primary Container with One Bar Code

[0055] The present invention further provides that the substrate that forms a container may be used as a primary container within a variety of container systems, which are described herein. In one embodiment, there is a material positioned over a portion of the substrate, over a bar code located on the substrate, or both. The bar code is disposed on the substrate in a manner heretofore described, is detectable using a reader as heretofore described, and represents fixed information and variable information as heretofore described. Further, the material in each of the container systems may be of the same chemical composition as the substrate heretofore described, although it is not necessary to carry out the invention. The primary container, as embodied in each of the container systems of the present invention, may also be of the same chemical composition as the substrate, or the material, or both, as heretofore described, although it is not necessary in order to carry out the invention. The present invention also provides that the material further comprises a secondary container such as an overpouch and the like.

[0056] It is understood that the primary container has an interior surface and an opposing exterior surface. Any predetermined number of bar codes could be disposed on the primary container's interior surface, the exterior surface, or both, provided that a reader can detect each bar code.

[0057] As heretofore described, the light-reflecting segments of this particular embodiment also are indicia that can be detected by a reader, and can be either visible or not visible to the naked human eye, or a combination thereof. If the light-reflecting segments are embodied in the visible spectrum, they can be colored white, red, yellow, orange, gold, and silver, or any color provided that, as heretofore described, the reflectivity difference between the light-reflecting segments disposed on the substrate and the light-absorbing segments defined on the substrate allows the light-reflecting segments, and preferably the resulting image, to be detected by a reader.

[0058] b. Primary Container with Two or More Bar Codes

[0059] In one particular embodiment, a primary container has a substrate, and the substrate has disposed thereon a first bar code. The first bar code is defined by a first plurality of light-reflecting segments that are on the substrate, and a first set of light-absorbing segments that are defined by the spaces in the first plurality. The first bar code represents fixed information, variable information, or both.

[0060] In the same embodiment, there exists a second bar code on the substrate of the primary container. The second

bar code is defined by a second plurality of light-reflecting segments, and a second set of light-absorbing segments that are defined by the spaces in the second plurality. The second bar code represents fixed information, variable information, or both. It is understood that the particular location of the first bar code and second bar code on the substrate is not critical, provided that both codes remain detectable using a bar code reader. The present invention contemplates that any predetermined number of bar codes could be made using this procedure. As part of the container system, there also exists a material, as heretofore described, that is positioned over a portion of either the first bar code or the second bar code, or both.

[0061] c. Primary Container and Material Each with a Bar Code

[0062] In yet another embodiment of the present invention, a first bar code representing fixed information or variable information is defined on a substrate that forms part or all of a primary container. The first bar code is formed in the same general manner heretofore described. The substrate has an interior surface and an exterior surface upon which the first bar code could be disposed. This embodiment also provides for a material positioned over a portion of the substrate or the first bar code, or both, as heretofore described. The material could further define a secondary container such as an overpouch, a dustcover, and the like.

[0063] The second bar code represents fixed information or variable information, and is defined in the same general manner as described above. That is, the second bar code is defined by a second plurality of light-reflecting segments separated by spaces and disposed thereon, and a second set of light-absorbing segments that are defined by the spaces of the second plurality. The material has a first side adjacent to the primary container and a second side opposed to the first side upon which the second bar code, or any number of bar codes, could be disposed. The combination of the first bar code and the second bar code represent both fixed information and variable information. As with any of the container systems described herein, two or more bar codes could be disposed on the substrate, or on the material, or both.

[0064] d. Material with One or with Two or More Bar Codes

[0065] The present invention also provides another embodiments for a container system wherein the substrate that forms a portion of the primary container has no bar code image disposed on it. Instead, the material as heretofore described has at least one bar code disposed on it. There may be a single bar code representing both fixed information and variable information. In another embodiment, the substrate still contains no bar code, but the material has two or more bar codes disposed thereon. Each bar code represents fixed information or variable information, or both. Additionally, the material has a first side adjacent to the substrate and a second side opposed thereto upon which any number of bar codes could be disposed. The exact location is not critical, provided that the bar code(s) are detectable by a reader. The bar codes are formed in the same general manner as heretofore described. If desired, the substrate could also contain any predetermined number of bar codes representing fixed information or variable information, or both.

[0066] 4. Methods

[0067] The present invention also provides a method for transferring a negative image bar code onto a web of material. The first step is to provide a web of material. The web can be of any known chemical composition provided that when the negative image bar code is transferred thereon, the reflectivity difference between the negative image bar code and the material is sufficient for the image to be detected using a reader. The next step of the method is to provide a printer capable of transferring a negative image bar code on the web in response to a signal representative of the negative image bar code having fixed information and variable information. The signal may be generated by a computer, software execution, a circuit, or any other known methodology, the details of which form no part of the present invention. The printer may be of any sort known generally, preferably a hot-stamp printer, a laser printer, an ink-jet printer, a flexographic printer, or a thermal printer; and more preferably a thermal transfer printer.

[0068] The next step is transferring the signal to the printer and then transferring the negative image bar code onto the web of material. The web may be any thermoplastic polymer or a thermoset polymer previously described. As explained above, the exact chemical composition of the material is not critical provided that the reflectivity difference between the negative image bar code and the material is sufficient for the negative image bar code to be detected using a reader.

[0069] The negative image bar code can be transferred anywhere on the web, including on the web's interior or exterior surface. The present invention contemplates transferring the negative image bar code onto a web of material that contains another bar code, such as a label copy bar code or even another negative image bar code. The web can also form part or all of a container, or all or part of a material such as those used in the above-described container systems. The present invention also provides for transferring two or more negative image bar codes where the negative image bar codes represent fixed information, variable information, or both, individually or in combination.

Comparative Analysis of Thermal Transfer Versus Hot Stamp Printing

[0070] a. Background and Materials

[0071] The quality and size of a thermal transfer printed barcode was compared against a hot-stamp printed barcode. For purposes of this analysis, and as will be explained in greater detail below, each barcode was investigated as to whether it would decode upon scanning and produce an average ANSI letter grade of "B" or higher. Additionally, the inventors examined whether each thermal transfer bar code could be decoded through a 1000 mL overpouch of high density polyethylene having a thickness defined below, and which is commercially available from Atofina Chemical & Oil under the Fina tradename, specifically Grade 7394.

[0072] The verification process employed in this comparative analysis involved a precision instrument PSC Quick Check™ 820 Laser/Mouse Compatible Barcode Verifier (PSC, Inc., Webster, N.Y.) SN: 83987 that is designed to decode bar codes and to evaluate the symbol print quality against a published ANSI standard, namely ANSI X3.182, which is contained in ANSI's *Bar Code Print Quality Guideline*, 1990 edition. The standard is outlined below.

[0073] Table 1 displays the tracking group identification given to containers tested. Group A included 100 containers commercially available from Abbott Laboratories (Sterile Water for Injection, USP 2000 mL NDC 0074-7118-07) where each container has a hot stamp barcode printed on the backside of the bag (opposite of label copy). No additional redesign, sterility treatment or packaging etc. for Group A was required or performed on the commercial embodiment. Group B included 300 containers commercially available from Baxter Healthcare Corporation known as PD185 TC Viaflex® solution bag containers with each container having a thermal transfer barcode printed on it. Table 1 also specifies that 60 containers from Group B were designated to and enclosed in an overpouch of a predetermined thickness.

- [0083] Traceability: 3-16-67-134
- [0084] Batch No.: NC 8-31-00C76 Box 4
- [0085] N=100 Sterile Water for Injection, USP 2000 mL NDC 0074-7118-07
- [0086] Jaguar J27-I4 Thermal Printer, SN: 14B0066
- [0087] PSC Laser Scanner Model #: 4100+A3043
- [0088] 6-mil aperture Mouse Wand (660 nm)
- [0089] 10-mil aperture Mouse Wand (660 nm)
- [0090] N=1 Ruler ID: L12687 Calibration Exp: Apr. 6, 2002

TABLE 1

Container Group	Container Size	Container Vendor	Quantity N =	Overpouch	
				Thickness	ID
A	2000 mL	Abbott	100	4.5 mil	N/A
				N = 100	
				2 mil	Stock: 1133-12
				N = 60	Batch: RT 4-6-01 Box 1
				4 mil	Stock: 1133-11
B	1000 mL	Baxter	300	N = 60	Batch: RT 4-6-01 Box 1
				6 mil	Stock: 1133-10 Batch:
				N = 60	RT 4-6-01 Box 1
				8 mil	Stock: 1133-9
				N = 60	Batch: RT 4-6-01 Box 1
				10 mil	Stock: 1133-8
				N = 60	Batch: RT 4-6-01 Box 1

- [0074] Other equipment used in this analysis includes:
 - [0075] Overpouches: (1000 mL) 100% Fina HDPE Grade—7394
 - [0076] 1 Roll 3M 810 Scotch®“Magic™” Tape ID: 34-8506-4916-0
 - [0077] 1 Roll Thermal Ribbon ID: TTR-71521
 - [0078] N=300 PVC Membrane Tubes,
 - [0079] Stock No. 332116,
 - [0080] Batch No.: NC Oct. 14, 1999 C 15 Box 1.
 - [0081] Cyclohexanone, Lot No.: 4872 T15641 Exp.: Dec. 6, 2001.
 - [0082] N=300 PD185 TC Viaflex® 1000 mL dual-port Containers:
 - [0091] Digital Caliper ID: L8435 Calibration Exp: Mar. 30, 2002
 - [0092] b. Printing of Normalized Thermal Transfer Barcodes and the Scanning of Pre-Sterilized, Hot-Stamped Barcodes
 - [0093] Prior to printing the thermal transfer barcode onto the containers of Group B (Baxter), the barcode symbology of Group A (Abbott) was first identified, and the encoded data verified against the human readable text, which was accomplished with the QuickCheck™ 820 Barcode Verifier using the Laser Scanner.
 - [0094] Table 2 identifies the data encoded, format of the human readable data, and dimensional length/width of the Abbott bar code (N=100).

TABLE 2

Symbology	Abbott				
	Encoded Data		Format	Dimensions	
	Type	Data		X	Y
Code 128 (UCC/EAN)		0100300747118076	16 (01) 0 030074 711807 6 98-4974-R2-6/00	72 mm	12 mm

[0095] Table 2 illustrates the symbology, data, number of characters, format, and dimensional length/width of the Abbott barcodes. The Abbott barcode uses a version of Code 128 under the UCC/EAN standard. The data displayed under the “Encoded Data” column was retrieved using the Laser Scanner of the Quick Check 820™ verifier.

[0096] The dimensional width was measured using a calibrated ruler.

[0097] The “X” dimension (Length) was measured from the outer side edge of one quiet zone to the outer side edge of the opposite quiet zone using a calibrated ruler.

[0098] The “Y” dimension (Height) was measured from the top edge of the quiet zone to the bottom edge of the same quiet zone.

[0099] The “Y” dimension (Height) had no analytical bearing on the testing procedures for this experiment.

[0100] The Abbott barcode was replicated using the Jaguar Printer’s imaging software. Once the dimensional layout and identification was created, the image was downloaded into the Jaguar handset. The thermal printer produced a barcode with the shortest element width (total barcode element width=total measured barcode length) of the same symbology, number of encoded data characters, and miscellaneous text identified in the Abbott barcode. The following steps detail the manner in which the Abbott barcode identification process was conducted:

direction. The scanner’s trigger was released, and the scanner’s position was held such that the above-described scanning position parameters were not changed.

[0103] The scanner’s trigger was again depressed and held in order to decode and identify the symbology and encoded data of the Group A barcode. The results of the scan were recorded, and the above steps were repeated to scan the remaining barcode samples of Group A. The trigger was depressed only when the scanner was used to scan a barcode. If an element of the scanning test environment was changed (e.g., lighting), the scanner was recalibrated as per above.

[0104] Table 3 shows the replication Abbott’s (Group A) barcode identification onto Baxter’s (Group B) Vialflex® containers.

[0105] The following barcode element width dimensions of N=150 barcodes produced an equivalent ANSI grade to that of the Abbott barcode. (See Table 8)

[0106] X dimension: 22 mm Y dimension: 10 mm

[0107] The following barcode element width dimensions of N=150 produced a better ANSI grade than that of the Abbott barcode. (See Table 8)

[0108] X dimension: 52 mm Y dimension: 10 mm

[0109] One barcode was printed on 300 Vialflex® containers and placed inside a plastic bag. The barcodes were printed at random zones or regions of the containers.

TABLE 3

Symbology	Encoded Data		Format	Dimensions	
				X	Y
Type	Data	Chars	Human Readable (Visual)	(N = 150)	(N = 150)
Code 128 (UCC/EAN)	0100300747118076	16	(01) 0 030074 711807 6 98-4974-R2-6/00	22 mm 52 mm	10 mm 10 mm

[0101] The QuickCheck™ 820 Verifier was calibrated using the calibration standard bar code available inside the user manual (*Quick-Check 600 Series User Manual*, 2nd edition 1994 Part No QCOM600 available from PSC, Inc.) and then attached to the Laser Scanner (“scanner”). Before any scanning was performed, the scanner was held at a distance of approximately a 3" directly above the barcode. As shown in FIG. 4, the scanner was oriented so that the top edge of the scanner is above the “top” side of the barcode and that the bottom edge of the scanner is above the “human readable data” side of the barcode. Also as shown in FIG. 4, the scanner’s aperture surface was oriented to an approximately 90° angle above the barcode.

[0102] The scanner’s trigger was then depressed and held to establish the correct scanning position. No data was recorded on this scan. The laser beam emitted from the scanner’s aperture should cross the entire width of the barcode, as is shown in FIG. 5. Without changing the angle or distance as specified above, the laser beam was moved to approximately the middle of the barcode, also shown in FIG. 5, by moving the scanner in a lateral or vertical

[0110] c. Shadow Test

[0111] The “shadow” test is a visual inspection test implemented in the barcode verification process in order to measure the integrity of the label to the substrate adhesion strength. The test employed Scotch® Magic™ Tape 810, which is available commercially from 3M and identified above, whereby the tape produces a shadow of that barcode to which it is applied. This shadow is the result of the printer’s ribbon label adhering to the tape once it is applied and removed from the barcode. The quantitative amount of “shadow” that is observed on the tape is then used to assess the integrity of the barcode surface that will survive abrasive contact or resist melting from extreme temperature conditions. An acceptable tape test result yielded less than approximately 50% of the ribbon label is transferred onto the tape. This test also helped visually assess any degradation of the barcode quality. The test was performed immediately following the print production process and was done only for the 300 Group B samples. Table 4 outlines the results:

TABLE 4

Baxter				
Print Size:	Sterilization Phase:	Sample Size:		
		0-50%:	51-100%:	
22 mm x 10 mm	Pre	150	150	0
52 mm x 10 mm	Pre	150	150	0

[0112] The scotch tape was applied to the barcode immediately following the print. A small trace (0-50%) of the foil was visible on the strip of tape for all prints. The scotch tape test result yielded less than 50% label transfer on the scotch tape, which qualified it as an acceptable print. There were no visible peel streaks created in any of the barcodes after the scotch tape was removed from it. Table 4 reflects data results generated for both Group B barcodes (1) 52 mmx10 mm and (2) 22 mmx10 mm. A sample size of 150 each was taken from each group.

[0113] d. Barcode Verification Scanning: ANSI Grade Report (Pre-Sterilization)

[0114] The ANSI Grade Report is an individual scan profile measurement report of the number of scans used to get a final ANSI Symbol Grade. This report uses the Scan Profile methodology found in ANSI's *Bar Code Print Quality Guideline*, which is identified above. The following steps were followed for the Viaflex® (Group B) containers. There were no results reported for the Abbott (Group A) barcodes because the Abbott container pre-sterilization stage was not applicable to this protocol.

[0115] First, a 6-mil aperture mouse wand was attached to the Scanner. Second, the Quick Check 820 scanner was calibrated (as set forth earlier) prior to scanning the barcode for identification. The Quick Check Verifier was then configured to achieve 10 scans per barcode for extended accuracy. Each individual scan of the 10 averaged by the Scanner was recorded during scanning. The Scanner then reported each scan grade as an alpha character. Each barcode on the 300 Group B containers was scanned by rolling the mouse wand over and across the middle of the barcode. Table 5 details the results.

TABLE 5

ANSI Grade (Pre-Sterilization) - Results: Baxter (Group B) - 6 mil Mouse Wand						
Print	Sterilization	Sample	Average		Dimensions	
Method:	Phase:	Size:	Scan Pass:	Grade:	X	Y
Thermal Transfer	Pre-	150	10	C	22 mm	10 mm
Thermal Transfer	Pre-	150	10	B	52 mm	10 mm

[0116] Table 5 indicates that the total average ANSI grade produced through thermal transfer print yielded a "C" out of a sample size of 150 (22 mmx10 mm barcodes) and a grade of "B" out of a sample size of 150 (52mmx10 mm barcodes). The sum or total average is the average of each individual sample scan average after a scan pass of 10. A 6-mil aperture mouse wand was used to test the grade for the thermal

printed barcodes. These samples were tested after printing and prior to fill and pouching.

[0117] e. Filling

[0118] Table 6 shows the fill and air volume used for the Viaflex® (Group B) containers:

TABLE 6

Container Size	Solution Volume (mL)	Air Volume Range (cc)
1000 mL	1050 mL ± 20 mL	55 cc ± 20 cc

[0119] All 300 containers were filled using the specifications listed above in Table 1.

[0120] f. Overpouch Assembly and Sterilization Cycles

[0121] All 300 Group B containers were transferred to the Vertrod Sealer. A stock roll of 100% HDPE film was cut to the lengths of 13½"x6½" (Refer to Table 1 for thickness of individual stock rolls). The film was then sealed manually using the Vertrod sealer. No defects were observed in the overpouch material. The containers were loaded inside the overpouch and then sealed. The samples were loaded on the sterilization trays with the barcode print facing up, whereby the barcode was not in direct contact with the tray. A sterilization cycle was then performed according to Specification 14-04-01-119 Cycle No. 04-026 at the maximum time and temperature conditions (i.e, 56.0 minutes at 252° F.).

[0122] g. Barcode Verification Scanning: Decode on Scan (Post-Sterilization)

TABLE 7

Samples					
GROUP	N	Read on Scan		Sterilization	
		Pass	Fail	Pre	Post
Baxter	300	300	0	N/A	300
Abbott	100	100	0	N/A	300

[0123] Table 7 shows that all barcodes were able to be decoded upon scanning. All 300 barcodes on the Viaflex® (Group B) containers and all 100 barcodes on the (Group A) Abbott containers were decoded through their respective overpouches with the Laser Scanner using scanning procedures detailed above. A maximum of 10 scan attempts were performed. The number of scans actually required to decode each individual units was not recorded. Only an observational note would be recorded for units failing to decode, of which there were none.

[0124] In some cases, water droplets were visible inside in the Baxter (Group B) overpouch as a result of recent sterilization. The overpouch was then pressed against the primary container film surface to disperse or remove the water droplets. Human hands were used to smooth away wrinkles that were present in the overpouch. The Abbott overpouches were observed to be completely dry. No overpouches needed to be removed for any barcode to be decoded.

[0125] h. Barcode Verification Scanning: ANSI Grade Report (Post-Sterilization)

[0126] For each of the 400 samples in Groups A and B, the respective overpouch was removed, the port tubes were cut off using scissors, and the samples were completely drained of all fluid. The scanning procedures detailed above were then employed for scanning each barcode and generating an ANSI grade report. The 300 Viaflex® samples were scanned using the 6-mil aperture mouse wand. The 100 Abbott samples could not be scanned using the 6-mil aperture or 10-mil aperture mouse wand. Instead, the Laser Scanner was used. One inherent difference between the mouse wand and Laser Scanner is that the mouse wand provides a reflectance grade where the Laser Scanner does not. This information may be used as a supplemental analytical tool guide to assess the quality of the barcode print in a pre-production print quality control verification process.

[0127] Next, a 15 square inch piece from each overpouch used to pouch the 300 Viaflex® samples was cut and pressed firmly over the barcode for scanning the barcode through the cut overpouch section. Human fingers were used to smooth out any wrinkles that were present. The same scanning procedures detailed above were used to scan the barcode through the overpouch and generate an ANSI grade report. All scans through an overpouch were achieved using the 6-mil aperture mouse wand. This same procedure was repeated for the 100 Abbott barcodes except that the Laser Scanner was used instead of the 6-mil wand. Further, the Group B barcodes were rescanned using the Laser Scanner to validate that the mouse wand and Laser Scanner could achieve the same end results. The following tables and graphs illustrate the results.

TABLE 8

ANSI Grade (Post-Sterilization); Out of Pouch - Results:

Group:	Sterilization	Sample Size:	Scan Pass:	Average Grade:	Dimensions		
					X	Y	N =
Baxter	Post	150	10	C	22 mm	10 mm	150
Baxter	Post	150	10	B	52 mm	10 mm	150
Abbott	Post	100	10	C	72 mm	12 mm	100

[0128] Table 8 indicates that the total average ANSI grade produced through thermal transfer print and hot stamp. The sum or total average grade is the average of each individual sample average after a 10 scan passes. The above tables also reflect the average ANSI Grade of the barcodes tested out of their respective pouches. These samples were tested after printing and after filling and pouching.

[0129] Thermal Transfer Barcodes (Group B):

[0130] The thermal transfer print yielded an average ANSI grade “C” out of a sample size of 150 for the 22 mm×10 mm Baxter barcode and an average ANSI grade of “B” for the 52 mm×10 mm Baxter barcode. A 6-mil aperture mouse wand was used to test the grade for the thermal printed barcodes. In addition, a Laser Scanner was used and yielded the same results.

[0131] Hot Stamp (Group A):

[0132] The hot stamp print yielded an average ANSI grade “C” out of a sample size of 100 in both table

results. A Laser Scanner was used to scan the hot stamp barcodes. A scan using a 6-mil aperture or 10-mil aperture mouse wand aperture was not achievable when testing the hot stamp barcode.

TABLE 9

ANSI Grade (Post-Sterilization); In Pouch - Results:

Print Method:	Sterilization:	Sample Size:	Scan Pass:	Pouch Thickness (mils):	Average Grade:
Baxter - 22 mm × 10 mm Barcode (Laser Scanner)					
Thermal	Post	21	10	2	C
Thermal	Post	21	10	4	C
Thermal	Post	21	10	6	C
Thermal	Post	21	10	8	C
Thermal	Post	21	10	10	C
Baxter - 22 mm × 10 mm Barcode (Mouse Wand)					
Thermal	Post	21	10	2	C
Thermal	Post	21	10	4	C
Thermal	Post	21	10	6	C
Thermal	Post	21	10	8	C
Thermal	Post	21	10	10	C

[0133]

TABLE 10

Print Method:	Sterilization:	Sample Size:	Scan Pass:	Pouch Thickness (mils):	Average Grade:
Baxter - 52 mm × 10 mm Barcode (Laser Scanner)					
Thermal	Post	21	10	2	B
Thermal	Post	21	10	4	B
Thermal	Post	21	10	6	B
Thermal	Post	21	10	8	B
Thermal	Post	21	10	10	B
Baxter - 52 mm × 10 mm Barcode (Mouse Wand)					
Thermal	Post	21	10	2	B
Thermal	Post	21	10	4	B
Thermal	Post	21	10	6	B
Thermal	Post	21	10	8	B
Thermal	Post	21	10	10	B

[0134]

TABLE 11

Abbott - 72 mm × 12 mm Barcode (Laser Scanner)

Print Method:	Sterilization:	Sample Size:	Scan Pass:	Pouch Thickness (mils):	Average Grade:
Hot Stamp	Post	42	10	4.5	C

[0135] Table 9 indicates that the total average ANSI grade of “C” was yielded for 42 (21 Laser Scanner+21 Mouse Wand) 22 mm×10 mm Baxter barcode samples. Table 10 indicates that the total average ANSI grade of “B” was yielded for 42 (21 Laser Scanner+21 Mouse Wand) 52 mm×10 mm Baxter barcode samples. Table 11 also reflects the average ANSI Grade of the 42 (Laser Scanner) hot stamp (Abbott) barcodes tested through their respective pouches yielded a “C”. The sum or total average is the average of each individual sample average after 10 scan passes. A 6-mil aperture mouse wand and a Laser Scanner were used to test

the grade for the thermal (Baxter) barcodes. Viaflex® sample numbers 130-150 of each Baxter barcode dimension size were used to test the print quality through the various overpouches thickness. These samples were tested after printing and after fill and pouching.

[0136] The above show that the thermal transfer print process was able to reduce the Abbott barcode image size (width) by approximately 69% and produce an equal ANSI Grade Average of "C" both out of pouch and in pouch. In the second part of this experiment, the thermal transfer print process was able to reduce the Abbott barcode image size (width) by 28% and produce an average grade of "B" both out of pouch and in pouch, whereby the Abbott barcode only reported an ANSI Grade Average read of "C" (out of pouch). The thermal transfer print process allowed for flexibility of desired barcode image print dimensions through the control of software. The barcode image quality was verified under the process of Barcode Print Verification. The verification process required that the Group A and Group B barcodes could be scanned and barcodes, illustrates that the image quality of the barcodes produced by thermal transfer requires a lesser need for reprinting bad barcodes based upon the higher quality of print that it produces.

[0137] It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

We claim:

1. A coding symbology comprising:
 - a substrate;
 - a plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining light-absorbing segments;
 wherein the light-reflecting segments and the light-absorbing segments define a negative image bar code representing fixed information and variable information; and
 - wherein the coding symbology is detectable using a reader.
2. The coding symbology of claim 1 wherein the light-reflecting segments are indicia that can be detected by a reader.
3. The coding symbology of claim 2 wherein the indicia is visible to the naked human eye.
4. The coding symbology of claim 3 wherein the indicia has a color selected from the group consisting of white, red, yellow, orange, gold, and silver.
5. The coding symbology of claim 3 wherein the indicia is not visible to the naked human eye.
6. The coding symbology of claim 1 wherein the fixed information remains unchanged for a first period of time while the variable information changes during the first period.
7. The coding symbology of claim 1 wherein the fixed information is selected from the group consisting of product name, product manufacturer, Universal Product Code, Universal Product Number, National Drug Code, National Health Related Industry Code, and label copy data.

8. The coding symbology of claim 1 wherein the variable information is selected from the group consisting of lot number, batch number, expiration date, serial number, production time, price, inventory control data, and concentration.

9. The coding symbology of claim 1 wherein the coding symbology is disposed on a medical container.

10. The coding symbology of claim 1 wherein the substrate comprises a thermoplastic polymer or a thermoset polymer.

11. The coding symbology of claim 1 wherein the thermoplastic polymer or the thermoset polymer is selected from the group consisting of polyvinylchloride, polyvinylidenechloride, polyolefins, polyamides, polycarbonates, polyesters, thermoplastic elastomers, elastomers, polyimides, polyurethanes, ethylene vinyl alcohol copolymers, ethylene vinyl acetate copolymers, ethylene copolymers, propylene copolymers, acrylic acid copolymers, ethylene substituted acrylic acid copolymers, α -olefin substituted acrylic acid copolymers, hydrocarbon block polymers, ethylene propylene diene polymers, nylon, mono-layer film structures and multi-layer film structures.

12. The coding symbology of claim 11 wherein the polyolefin is produced from an α -olefin having from about 2 to about 20 carbons.

13. The coding symbology of claim 12 wherein the α -olefin is ethylene or propylene.

14. A container having a coding symbology comprising:

a substrate;

a plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining light-absorbing segments;

wherein the light-reflecting segments and the light-absorbing segments define a negative image bar code representing fixed information and variable information;

wherein the coding symbology is detectable using a reader; and

wherein the substrate comprises a pouch-type flexible container.

15. A coding symbology comprising:

a substrate;

a first plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a first set of light-absorbing segments, and wherein the first plurality and the first set define a first bar code representing fixed information;

a second plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a second set of light-absorbing segments, wherein the second plurality and the second set define a second bar code representing variable information; and

wherein the coding symbology is detectable using a reader.

16. A container having a coding symbology comprising:

a substrate defining a portion of the container;

a plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining light-absorbing segments;

wherein the light-reflecting segments and the light-absorbing segments define a negative image bar code representing fixed information and variable information;

wherein the negative image bar code is detectable using a reader; and

wherein the container is a medical container.

17. A container comprising:

a substrate;

a first plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a first set of light-absorbing segments, and wherein the first plurality and the first set define a first bar code representing fixed information;

a second plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a second set of light-absorbing segments, and wherein the second plurality and the second set define a second bar code representing variable information;

wherein the first bar code and second bar code are detectable using a reader; and

wherein the container is a medical container.

18. A container system comprising:

a primary container having a substrate;

a plurality of light-reflecting segments separated by spaces and disposed on the substrate, wherein the spaces define light-absorbing segments, wherein the light-reflecting segments and the light-absorbing segments define a bar code representing fixed information and variable information, and wherein the bar code is detectable using a reader; and

a material positioned over a portion of the substrate.

19. A container system comprising:

a primary container having substrate;

a first plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a first set of light-absorbing segments, and wherein the first plurality and the first set define a first bar code representing fixed information;

a second plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a second set of light-absorbing segments, and wherein the second plurality and the second set define a second bar code representing variable information;

wherein the first bar code and the second bar code are detectable using a reader; and

a material positioned over a portion of the substrate.

20. A container system comprising:

a primary container having substrate;

a first plurality of light-reflecting segments separated by spaces and disposed on the substrate, the spaces defining a first set of light-absorbing segments, and wherein the first plurality and the first set define a first bar code representing fixed information or variable information;

a material positioned over a portion of substrate;

a second plurality of light-reflecting segments separated by spaces and disposed on the material, the spaces defining a second set of light-absorbing segments, and wherein the second plurality and the second set define a second bar code representing fixed information or variable information;

wherein the first bar code and the second bar code are detectable using a reader; and

wherein the combination of the first bar code and the second bar code represent fixed information and variable information.

21. A container system comprising:

a primary container having a substrate;

a material positioned over a portion of the substrate;

a plurality of light-reflecting segments separated by spaces and disposed on the material, the spaces defining light-absorbing segments, and wherein the light-reflecting segments and the light-absorbing segments define a bar code representing fixed information and variable information; and

wherein the bar code is detectable using a reader.

22. A container system comprising:

a primary container having substrate;

a material positioned over a portion of the substrate;

a first plurality of light-reflecting segments separated by spaces and disposed on the material, the spaces defining a first set of light-absorbing segments, and wherein the first plurality and the first set define a first bar code representing fixed information;

a second plurality of light-reflecting segments separated by spaces and disposed on the material, the spaces defining a second set of light-absorbing segments, and wherein the second plurality and the second set define a second bar code representing variable information;

wherein the first bar code and the second bar code are detectable using a reader.

23. A method of transferring a negative image bar code onto a web of material comprising the steps of:

providing a web of material;

providing a printer capable of transferring a negative image bar code onto the web in response to a signal representative of the negative image bar code, the negative image bar code representing fixed information and variable information; and

transferring the signal to the printer; and

transferring the negative image bar code onto the web of material.

24. The method of claim 23 wherein the printer is a thermal transfer printer.

25. A container system comprising:

a primary container having a substrate;

a material positioned over a portion of the substrate;

wherein the container system has a negative image bar code representing fixed information and variable information, and wherein the negative image bar code is detectable using a reader.

26. The container system of claim 25 wherein the negative image bar code is disposed on the primary container.

27. The container system of claim 25 wherein the negative image bar code is disposed on the material.

28. The container system of claim 25 wherein the material is positioned over a portion of the negative image bar code.

29. A container system comprising:

a primary container having a substrate;

a material positioned over a portion of the substrate;

wherein the container system has a first negative image bar code representing fixed information and a second negative image bar code representing variable information, and wherein the first and second negative image bar codes are detectable using a reader.

30. The container system of claim 29 wherein the first and second negative image bar codes are disposed on the primary container.

31. The container system of claim 29 wherein the first and second negative image bar codes are disposed on the material.

32. The container system of claim 29 wherein the first negative image bar code is disposed on the primary container and the second negative image bar code is disposed on the material.

* * * * *